



Edilgrappa Rescue Tools


Compatible with DeWalt® Flexvolt™ Batteries

MDC390N-E Battery Powered Hydraulic Combi-Tool

The MDC390N-E Cordless Battery Powered Combi-Tool by Edilgrappa is a versatile and powerful tool designed for demanding extrication operations. Combining the functionalities of a cutter and a spreader, this combi-tool is ideal for urban search and rescue (USAR) missions.

- Efficiently cuts, pulls, and spreads, making it a must-have for rescue operations.
- Provides enhanced durability and performance.
- NFPA 1960 - Current edition
- Ensures safety and reliability.
- Lightweight and ergonomically designed for ease of use in critical situations.
- 54V brushless motor
- Whether you're a professional rescuer or part of an emergency response team, the MDC390N-E offers the power and versatility needed to handle the toughest challenges.

- Spreading distance: 15.5"
- Cutter opening: 7.2"
- Working pressure: 10,153 psi, 70 MPa (700 bar)
- Cutter rating: A6 / B7 / C6 / D7 / E7
NFPA 1960 - Current edition
- Highest spreading force: 8,918 lbf, 39.7 kN (4 t)
- Lowest spreading force: 6,655 lbf, 29.6 kN (3 t)
- Dimensions (closed): 33.9" L x 10.8" W x 9.5" H
- Dimensions (open): 29.7" L x 14.2" W x 9.5" H
- Weight: 48.9 lbs.

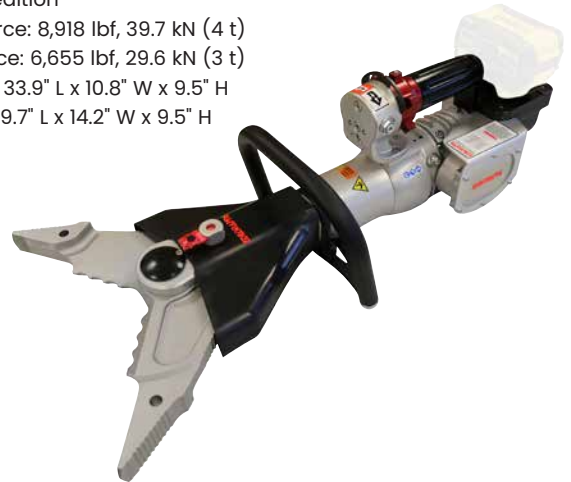

BP961 | MDC390N-E Battery Powered Hydraulic Combi-Tool | CALL FOR PRICING

MT730N-E Battery Powered Hydraulic Telescopic Ram

Engineered to provide exceptional performance, versatility, and ease of use, making it an indispensable asset for rescue professionals.

- The MT730N-E is equipped with two plungers, allowing it to achieve an impressive extension of up to 574 mm. This feature ensures maximum reach and flexibility in various rescue situations.
- Despite its powerful capabilities, the ram is designed to be compact and lightweight, making it easy to maneuver in tight spaces and transport.
- Delivers consistent and reliable performance.
- Built with high-quality materials, this telescopic ram is designed to withstand the rigors of rescue operations, ensuring durability and reliability.
- 54V brushless motor
- EN 13204 classification: TR215/160-76.4/124-16.7
- NFPA 1960 - Current edition

- Max extension with extension: 49.6"
- Max height: 22.6"
- Working pressure: 10,153 psi, 70 MPa (700 bar)
- Highest spreading force (Piston 1):
48,379 lbf (24.1 tons), 215.1 kN (21.9 t)
- Spreading force (Piston 2):
17,179 lbf (8.6 tons), 76.4 kN (7.8 t)
- Dimensions (closed): 17.80" L x 7.28" W x 11.42" H
- Dimensions (open): 17.80" L x 7.28" W x 22.60" H
- Weight: 47.4 lbs.



BP963 | MT730N-E Battery Powered Hydraulic Telescopic Ram | CALL FOR PRICING



You Serve Others. We Serve You.™



Edilgrappa Rescue Tools


Compatible with DeWalt® Flexvolt™ Batteries

DE625N-E Battery Powered Hydraulic Spreader

State-of-the-art tool designed for efficient and powerful vehicle extrication and rescue operations. Battery and charger not included.

- Max spreading distance: 24.6"
- Working pressure: 10,153 psi, 70 MPa (700 bar)
- Spreading force: 39,108 lbf, 174 kN (17.7 t)
- HSF Highest spreading force: 13,625 lbf, 60.6 kN (6.2 t)
- LSF Lowest spreading force: 7,394 lbf, 32.9 kN (3.4 t)
- HPF Highest spreading force: 10,341 lbf, 46 kN (4.7 t)
- LPF Lowest spreading force: 5,845 lbf, 26 kN (2.7 t)
- Squeezing force: 15,512 lbf, 69 kN (7.0 t)
- Motor: 54V / 60V BRUSHLESS
- EN 13204 classification: AS 45/625-19
- NFPA 1936 - Current Edition

- Equipped with a 54V brushless motor, ensuring efficient and long-lasting operation.
- Dimensions (closed): 31" L x 11.1" W x 9.6" H
- Dimensions (open): 27.6" L x 24.6" W x 9.6" H
- Weight: 47.4 lbs.

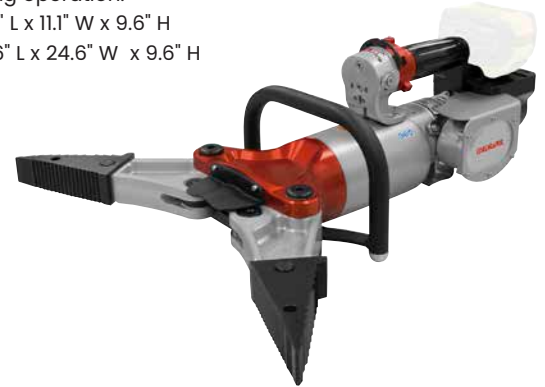

BP962 | DE645N-E Battery Powered Hydraulic Spreader | CALL FOR PRICING

F150N-E Battery Powered Hydraulic Cutter

The F150N-E offers the freedom of cordless operation, allowing you to work efficiently without the constraints of power cords. Its powerful battery ensures long-lasting performance, making it perfect for on-site jobs.

- Effortlessly slices through tough materials including steel rods, cables, and chains
- Ergonomic handle and lightweight construction reduces operator fatigue and enhances maneuverability.
- Equipped with an automatic pressure release valve and a protective blade guard.
- Constructed from high-quality materials that ensure durability and longevity.

- Certified Compliant to NFPA 1960 - Current Edition

- Max Opening: 5.8"
- Working Pressure: 10,153 psi, 70 MPa (700 bar)
- Motor: 54V brushless
- Protection Rate: IP54
- Dimensions (closed): 30.6" L x 11.2" W x 9.5" H
- Dimensions (open): 30.0" L x 10.7" W x 9.5" H
- Weight: 46.08 lbs.



BP960 | F150N-E Battery Powered Hydraulic Cutter | CALL FOR PRICING

MUI6 USAR Battery Powered Hydraulic Rebar Cutter

The MUI6 is designed to be easily portable, allowing rescue teams to maneuver it in tight spaces and challenging environments. It features a 360° swiveling head, providing maximum flexibility and ease of use in various cutting situations.

- Built to handle various materials encountered during rescue operations, including steel mesh, rebars, chains, padlocks, and security seals.
- Equipped with a 18V brushed motor, ensuring efficient and long-lasting operation.
- Built with high-quality materials designed to withstand the rigors of rescue operations.

- Cutting capacity: $\frac{5}{8}$ ", (Rm: 70 daN/mm²)
- Working pressure: 8122 psi, 56 Mpa (560 bar)
- Cutting force: 38,450 lbf, 171 kN (17.4 t)
- Head rotation: 360°
- Dimensions: 19.13" L x 7.24" W x 11.93" H
- Weight: 18.96 lbs.



BP964 | MUI6 USAR Battery Powered Hydraulic Rebar Cutter | CALL FOR PRICING